One-Stop Tools Station

TESTE





Product Catalogue 2025

TLITAL

One-Stop Tools Station







Brushless motor Voltage:20V Square drive:1/2" No-load speed: 0-1400/0-1900/0-2400rpm

Impact rate: 0-2100/0-2500/0-2900bpm

Impact rate: 0-1500/0-1800/0-2200bpm Fastening torque:850Nm Nut-Busting torque:1000Nm Integrated work light





/<u>20v</u>//**@***/@)





<u>/12v</u>//==\/**6***//**(_**)/#//@//:://









20V 0-900 0-5100 0-5100



One-Stop Tools Station



Lithium-Ion USB-A Charger Voltage: 20V Output power: 5V/1A 5V/2A

Battery and charger NOT included

42780 TROSLI2001 20V P205 _ithium-lon Random Orbit Sander

Battery and charger NOT included



Lithium-Ion Angle Grinder

Brushless Motor Voltage: 20V No-load speed: 9000/min Disc diameter: 115mm Spindle thread: M14

Battery and charger NOT included



42782 TMS2001 20V





Voltage:20V No-load speed:3000rpm Blade size:210mm(8-1/4")*25.4mm Cutting capacity: 0**0*:120**60mm 45**0**63**60mm 0**45**120**34mm 45**45**83**34mm



Battery and charger NOT included



Lithium-Ion Jigsaw

Voltage:20V No-load speed:10000/min Bottom bass:125mm With 5pcs sand papers

Voltage: 20V No-load speed: 2400rpm Cutting capacity: Metal: 8mm Wood: 80mm

Battery and charger NOT included





Lithium-Ion Reciprocating Saw

No-load speed Cutting capacity Dimensions Weight

1 pc Wood saw blade 1 pc Metal saw blade













Battery and charger NOT

included



Lithium-Ion Auto Air Compressor

Voltage: 20V Max. pressure: 150PSI/10BAR

Battery and charger





Lithium-Ion Aspirator Blower

Voltage: 20V No-load speed: 10000/12500/17000/min

Battery and charger NOT included



Lithium-lon

Voltage:20V Dust Capacity:0.7L Vacuum Pressure:High ≥7.0KPa Normal ≥5.0KPa Stainless steel filter net With 1pcs crevice nozzle

Vacuum Cleaner





/<u>20V</u>//🗖





Lithium-Ion Air Compressor

Voltage: 20V 160PSI Auto With 3Pcs LED light Digital display Automatic stop at the specified pressure

Powered by vehicle or by Lithium-lon battery Max pressure 11 bar Max flow 50 lit / min Charger 1 h Weight 2.2 Kg



Voltage:20V Max Pressure:24.8Bar Flow rate:2.2L/min Auto stop system

Charge volts: 220-240V~50/60Hz



44214





COTOLIESS CITCUIAI SAW
Brushless motor
Voltage: 20V
No-load speed: 4800rpm
Blade diameter: 185mm(7-1/4")
Arbor size:20mm
Gruting capacity:
45" degree: 45mm
90" degree: 55mm
Adjustable cutting depth
Adjustable bevel cutting
Include:
1 Pes 185mm saw blade

1 Pcs 185mm saw blade Battery and charger sold separately Packed by color box



Battery and charger





One-Stop Tools Station





TGGLI2001 100W P20S Battery and charger NOT

Lithium-Ion Glue Gun

Gluing capacity Glue stick diameter Heat-up time Dimensions Weight



Voltage: 20V LED power dissipation: 20W

Battery and charger **NOT** included



<u>/20v</u>/ 44522

TBL12002 **20V**



Battery and charger NOT included



DC Voltage: 20V AC Voltage: 220V-240V_50/60Hz Speed settings: 2 Dimensions: 11"

Included

1 Pcs reflection nozzle
1 Pcs reflector nozzle
1 Pcs flat nozzle
1 Pcs flat nozzle
Battery and charger sold separately Packed by color box

20V 300/550°C 100/200 L/min



Battery and charger

<u>/20V</u>/ 44521

included

TDRLI2060151





Included 3 Pcs sockets(13,17,19mm) Battery and charger sold separately Packed by color box

Voltage: Max.torque: Square Drive: No-load speed: 20V 65Nm 3/8" 250rpm

Battery and charger NOT included

P20S



Voltage:20V No-load speed 5000/20000/min



41854

<u>/20V</u>/



Angle Grinder

Voltage: 220V-240V _ 50/60Hz Input power: 2400W No-load speed: 6300rpm Disc diameter: 230mm Spindle thread: M14

With 1pc auxiliary handle With 1 set carbon brushes







SDS PLUS



Rotary Hammer

Voltage: 220V-240V _50/60Hz Input power: 800W No-load speed: 0-1100rpm Impact rate: 4000bpm Impact energy: 2.5J Max. drilling capacity: Concrete: 26mm



With 3 drills and 2 chisels

Voltage: 220V-240V _ 50/60Hz Interpretation of the control of the













41856





Rotary Hammer

Voltage: 220V-240V_50/60Hz Input power: 1500W No-load speed: 0-850rpm Impact rate: 4400bpm Impact energy: 5.5J Max. drilling capacity: Concrete: 32mm Steel: 13mm Wood: 40mm



With 3 drills and 2 chisels With 1 set carbon brushes

41487

TAT40122 12.5mm





All Impact Witherian Square drive: 12.5mm(1/2") No-load speed: 7000 rpm Max.torque: 610Nm (450ft) Weight: 26KG Twin hammer mechanism With 3 pes socket: (17mm, 19mm,21mm) With Europe, USA, Nitto and Italy type connector



Air Consumption: 142.5l/min (5.0cfm)
Air Pressure: 6.2bar (90psi)
Length: 187 mm (7.3°)
Weight: 2.6kgs (6.7lbs)
Air Inlet: 1/4
Air hose: 3/8°
Packed by color box

41488



Square drive: 19mm (3/4") No-load speed: 4000rpm Max. torque: 1600Nm (1180ft) Weight: 6.0kg Twin hammer mechanism Universal connector





One-Stop Tools Station











With 2pc blade 11.2mm glue sticks















TLITAL

One-Stop Tools Station



TP130005N 3000W



Gasoline Generator

Voltage: 220V-240V Frequency: 50/60HZ Max. output: 3000W Rated output: 2800W Rated speed: 3000rpm Engine: 4 stroke, OHV Displacement: 210ml

Cooling system: Air-cooled Ignition system: T.C.I Starting system: Recoil Aliminum wire alternator Fuel tank: 151 Dry weight: 42kg Packed by carton box


41752 6500W

Gasoline Generator

0

Voltage: 220V-240V Frequency: 50HZ Max. output: 6500W Rated output: 5000W Rated speed: 3000rpm Engine: 4 stroke, 0HV Displacement: 420ml

Cooling system: Air-cooled Ignition system: T.C.I Starting system: Recoil + Electric Copper wire alternator Fuel tank: 251 Dry weight: 84kg Packed by carton box



Current: 600A
With LED lamp
Clamp size: 18x11cm
Suitable for emission < 4.5l car
Cable material: copper coated
Cable outside diameter: 10mm
Cable length: 3m

3 layers Steel thickness: 0.6_0.8mm



Item No.	Size
41524 THT10701	495 x 200 x 290mm

With 1 set auxiliary handle and wheels





INDUSTRIAL

Star Socket	Set	
14pcs –		C

Heat treated Chrome plated

Item No includes 5 Pcs 1/4" Socket: E4-5-6-7-8 5 Pcs 3/8" Socket: E10-11-12-14-16 4 Pcs 1/2" Socket E18-20-22-24 THKTETS0114



SAMSUNG LED

THPTCS70971

Tool Chest Set CHEST PART: Overall size: 520 x 218 x 243mm Thickness of Cabinet: 0.8mm

Thickness of drawer:

One Top Tray Area: 506 x 215 x 63mm Two drawers: 449 x 196 x 54mm



Headlamp

41746

Brightness:
Max: 200 lumens
Low: 50 lumens
Uses alkaline 3AAA battery
Max. 91m beam distance
IPX4 rain resistant
Packed by double blister

SAMSUNG LED

With 18 pockets



41574

8 pcs Screwdrivers: SL3x75mm, 4x100mm, 5x125mm, 6x100mm, 8x200mm, PH1x80mm, PH2x100mm, PH3x200mm

11 pcs Combination spanners: 6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 17mm

1 pc Pump pliers, 10" 1 pc Steel measuring tape, 3m x 16mm 1 pc Utility knife

Second drawer: 7 pcs

- pc Combination pliers, 8" pc Long nose pliers, 6" pc Diagonal cut pliers, 7"
- 1 pc Slotted screwdriver, 10"
- Top chest: 70 pcs

- op entest: 70 pcs pc 1/2" Ratchet wrench (45T) pc 1/4" Ratchet wrench (45T) pc 1/4" Spinner handle pc 1/2" Universal joint pc 1/4" Universal joint pc 1/2" Flex handle, 375mm 1 pc 1/2" Flex handle, 375mm 2 pcs 1/2" Extension bars: 125mm
- (5"), 250mm (10") 2 pcs Spark plug socket 1/2": 16mm & 21mm

TSP9306

Auto Darkening Welding Helmet

Heinrich

Viewing Area: 92×42mm
Cartridge Size: 110×90×9mm
Arc Seneor; 2
Optical Class: 1/1/12
Light State: DiN 4
Dark State: Variable shade, 9~13
Shade Control: External Variable
Power On/Off: Fully Automatic
Sensitivity Control: AUTO
UV/IR Protection: DIN 16
Power Supply: Solar cells +2xCR2032
Lithium batteries

92x42mm (9) Grind Fuent -

Viewing Area

Switching Time: 1/15000S from Light to Dark Dark to Light (Delay): 0.1-10 Auto Low Amperage TIG: ≥ 10amps(DC) ≤ 10amps(DC) ⊆ 10amps(DC) ⊆ 10amps(DC) ⊆ 10amps(DC) Grinding Function: YES Operating Tep: -5°C _ +5°C Storing Tep: -2°C _ +7°C Packed by color box

alloy: 6N01-T6 Brightness: 200 lumnes Uses alkaline 3AAA battery 41573 TSP610 Face Shield

Impact resistant visor Brim protects forehead from outside injury Headgear with adjustable knobs Antibacterial sweatband

One-Stop Tools Station





SL4.0, SL5.5, SL6.5



PH1. PH2. PH3



PZ1. PZ2

Material: S2 industrial steel with magnetic With 1pc bit holder with quick release Packed by sliding card

Item No.	Diameter
41707 TACSD3091	PH1, PH2, PH3, SL4.0, SL5.5, SL6.5, PZ1, PZ2

New design handle Cr.

Item No.	Diameter
41516	
	1pcs SL5.5x5x75; 1pcs SL5.5x5x100; 1pcs SL6.5x6x15
THT250606	1pcs PH1x5x75; 1pcs PH1x5x100; 1pcs PH2x6x150



Item No.	Diameter
41517	SL2.0x50; SL2.5x50; SL3.0x50
THT250726	PH00x50; PH0x50; T6x50; T8x50





Item No.	Diam	eter
41731 THT250618	1pcs SL6.5x6x100 1pcs SL8.0x8x150	1pcs PH1x5x75 1pcs PH2x6x100 1pcs PH3x8x150 1pcs PH2x6x38



Item No.	Diam	eter
41525 THTIS566	1pcs SL3.0x75 1pcs SL4.0x100 1pcs SL6.5x150	1pcs PH0x60 1pcs PH1x80 1pcs PH2x100



Ratchet Screwd	lriver Sel			2
pcs ratchet handle olding handle ligh quality ratchet		VDUSTRI	AU) C	r.V
Item No.	Size	(6.35x25	mm)	l
	0.12	DHU	D70	1

Item No.	Size	(6.35x25ı	nm)
	SL4	PH0	PZ0
41518	SL5	PH1	PZ1
TACSD30136	SL6	PH2	PZ2
	SL7	PH3	PZ3

PH2x25



Item No.	Size (mm)
41937	6, 8, 10, 13, 14, 15,
THT102286-I	17, 19

Black finish and polish Insulated handle Stand high pressure:1000V Packed by half double blister

Item No.



Item No.	Size (mm)
41557	8, 10, 12, 13, 14,
THT102RK086	15, 17, 19
IIIIIIOZIIIIOOO	10, 17, 10

Black finish and polish Insulated handle Stand high pressure:1000V Packed by half double bliste

43822 THTIP2171





Hex Key Sizes	1.5 - 10r
Torx Key Sizes	T10 - T
1/2" Impact Soc	ket Set
10pcs	

Item No.	41798 THT106KT0181
Hex Key Sizes	1.5 - 10mm
Torx Key Sizes	T10 - T50










One-Stop Tools Station



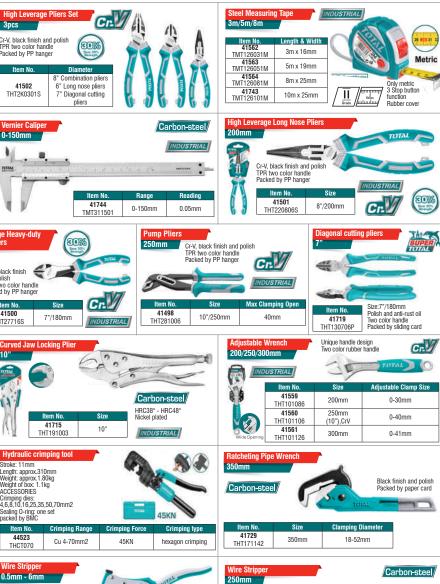



Drop-forged steel Double dipped grip handle







8.5"/215mm

THT0109



10"/250mm

41730


INDUSTRIAL



One-Stop Tools Station



Saw Corkscrew Nail cleaner Nail file Key ring THMFK0156 Leather punch Bottle Opener Hook remove



10pcs

10Pcs/Set SK4 steel blades Surface treatment: high tempered black Suitable for item THT511816/THT511826/ THT511836/TG5121806

Item No.	Size
41543	Size: 18X100mm
THT510181	SIZE. TOXTUUITIII







Length:185mm







Construction timber: <100mm, Wooden wall: <100mm, Boards, Chipboards, Medium density fibre TAC52644D board (MDF): 6-60mm, Plywood, Plastic: <100mm especially for Plunge cuts











mechanism













Item No Size (mm) 41490 22.2mm (7/8")



Flap Disc

THT519611

Suitable for high steel, steel, cast iron and sheet steel

Item No.	Ø (mm)
41783	115, P40
TAC631151	110, P40
41784	115, P60
TAC631152	113, F00
41785	115, P80
TAC631153	· '



Depressed centre grinding disc for metal

Item No.	Size (mm)
41706 TAC2231151	115mm (4/1/2") x 6.0mm (1/4") x 22.2mm (7/8")
41867 TAC2232301	230mm(9") X6.0mm(1/4")



Flat centre cutting disc for metal

Item No.	Size (mm)		
41865 TAC2212303	230mm (9")		
	x 1.9mm (5/64")		
	x 22.2mm (7/8")		
41866	350mm (14")		
TAC2213551	x 3mm (1/8")		
	x 25.4 mm (1")		











Cr





41546 THT918516



3	Stoning Hammer 1500g
	45# Carbon Steel Heat treated Unique fibreglass han Packed by label


Drop forged







1 x Flat steel file 1 x Half round steel file 1 x Round steel file









41526 THT13141 41527

THT13161



6







Item No.	Clamp Size	
41529 THT1320501	50 x 150mm	
41530 THT1320502	50 x 200mm	
41531 THT1320801	80 x 300mm	
41532 THT1321203	120 x 500mm	

Max. clamp force: 170kgs Thickness and width of iron ruler: 5 x 15mm Diameter of screw thread: 11mm Max. clamp force: 170kgs
Thickness and width of iron ruler:
5 x 15mm
Diameter of screw thread: 11mm Max. clamp force: 270kgs Thickness and width of iron ruler: 6 x 22mm Diameter of screw thread: 13.5mm Max, clamp force: 450kgs Thickness and width of iron ruler: 8 x 30mm Diameter of screw thread: 15.3mm

4"/6"/8"	
With anvil	
	7

Item No.	Swivel Base Size	Weight	Max. Force
41533 -THT6146	4"	6.7kg	1300kgs
41534 -THT6166	6"	11.2kg	1600kgs
41535 -THT6186	8"	21kg	2500kgs









Item No.	Width	Bristle Length	Thickness
41551 THT846016	1"	45mm	10mm
41553 THT846026	2"	51mm	11mm
41554 THT846036	3"	57mm	12mm


















328 Pcs Tool Chest Set

THPTCS73281 328pcs





CHEST PART: With 7pcs drawers Overall size:765x465x812mm Overall with casters size:765x465x976mm Casters size:5"*2" Thickness of Cabinet: 0.8-1.0mm Thickness of cabineticus-1, umm
Thickness of drawer:0.7mm
With Spcs \$36x410x74.5mm drawer
With 2pcs \$36x410x153.5mm drawer
5Pcs iron hooks(for hanger tools)
Packed in EVA foam + carton box + Pallet

TOOLS PART:

1Pcs Ratchet wrench: 1/4"

13Pcs 1/4" socket 4-4.5-5-5.5-6-7-8-9-10-11-12-13-14

24Pcs 1/4" x 32(L) bits Socket:Hex:3-4-5-6-7-8-10mm Star: T8-T10-T15-T20-T25-T27-

T30-T40 SL:4-5.5-7mm,PH1,PH2,PH3,PZ1,PZ2,PZ3. 8Pcs 1/4"DR 50mm(L) Deep socket:6-7-8-9-10-11-12-13mm

6Pcs 1/4" star socket:E4-E5-E6-E7-E8-E10

2Pcs Extension bar:1/4"Dr. x 50mm,1/4"Dr. x 100mm

1Pcs Spinner handle:1/4"x150mm 1Pcs Extension flexible bar :1/4" x 150mm

1Pcs 1/4"Universal joint 1Pcs Sliding "T" Bar:1/4"x 114mm

1Pcs 1/4" three way adaptor:3/8"(F)*1/4"(M)

1Pcs bit holder:1/4"*6.35mm

40Pcs 6.35*25mm(L) bits:T5-T6-T7-T8-T9-T10-T15-T20-T25-T30-PH1-PH2-PH3-PH4-PZ1-PZ2-PZ2-PZ3-PZ4

-SL3-SL3-SL4-SL4-SL5-SL5-SL6-SL6.5-SL7-SL7-H2-H3-H3-H4-H4-H5-H6-H7-H7 1Pcs magnetic shank:6.35mm*100mm

1Pcs Ratchet wrench: 1/2"

1Pcs 1/2"Universal joint

19Pcs 1/2"DR Sockett8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-27-30-32mm 4Pcs 1/2"DR 77mm(L) Deep socket: 14-15-17-19mm

8Pcs 1/2" Star Socket:E10 12 14 16 18 20 22 24 2Pcs Spark plug socket: 1/2"Dr.16mm -21mm

1Pcs 1/2"*250mm Sliding T bar

2Pcs Extension bar:1/2"Dr. x 100mm,1/2"Dr. x 250mm

3Pcs 1/2"x58mm(L) bits socket:T55-T60-T70 1Pcs 1/2" three way adaptor:3/8"(F)x1/2(M)

32Pcs 8x30mm(L) bits:PH3-PH4-PZ3-PZ4-H7-H8-H10-H12-H14-SL5-SL6-SL6-SL8-T20-T25-T27-T30-T35-T40-T45-T50-T55-T27H-T30H-T35H-T40H--T45H-T50H-M5-M6-M8-M10

1Pcs bit holder: 1/2"*8mm

13Pcs 3/8" hexagonal socket:10-11-12-13-14-15-16-17-18-19-21-22-24mm 9Pcs 3/8" deep hexagonal socket: 10-11-12-13-14-15-16-17-19mm

7Pcs 3/8" star socket:E10-E11-E12-E14-E16-E18-E20

1Pcs ratchet wrench: 3/8"

2Pcs 3/8" extension bar:75mm(3"),150mm(6")





1Pcs 3/8" three way adaptor:3/8"(F)x3/8(M)

14Pcs screwdriver:SL3*75,SL4*100,SL5.5*100,SL6.5*38,SL6.5*125,SL6.5*150, SL8*200, PH0*75,PH1*75,PH1*100,PH2*38,PH2*125,PH2*150,PH3*200 8Pcs T-handle hexwrench:2*75mm,2.5*75mm,3x100mm,4x100mm,5x150mm,6x150m

m,8*200mm,10*200mm 8Pcs T-handle Torx wrench:T10X75mm,T15X75mm,T20X100mm,T25X100mm,T30X-

150mm,T40X150mm,T45X200mm,T50X200mm

17Pcs Combination spanner:6-7-8-9-10-11-12-13-14-15-16-17-18-19-21-22-24 5Pcs Flare nut Spanner:8*10,10*12,11*13,12*14,17*19

5Pcs Double flexible socket wrench:8*9,10*11,12*13,14*15,17*19 12Pcs Offset ring spanner: 6*7,8*9,10*11,12*13,14*15,16*17,18*19,20*22,21*23,2

4*27.25*28.30*32.

9Pcs Hex Key Wrench:1.5-2-2.5-3-4-5-6-8-10

9Pcs Trox Key Wrench:T10-T15-T20-T25-T27-T30-T40-T4-T50 1Pcs 10"Curved law lock wrench

1Pcs 40mm Rubber and plastic hamme 1Pcs 10" Water pump pliers

1Pcs 8" high leverage long nose pliers

1Pcs 8" high leverage bent nose pliers 1Pcs 8" high leverage combination pliers

1Pcs 7" high leverage diagonal cutting pliers

4Pcs circlip pliers 1Pcs 300g Machinist Hammer

1Pcs 10"Adjustable wrench

1Pcs Hacksaw frame

3 pcs cold chisel: 10x142mm 13x152mm 16x172mm 6 pcs pin punch: 1.5x152mm 3x152mm 4x152mm 5x152 6x152mm 8x152mm

1 pcs taper punch: 2x140mm(3/32"x5-1/2") 2 pcs centre punch: 6x102mm(1/14"x4") 8x115mm(5/16"x4-1/2")

5 Pcs steel file set:

Flat steel file 1pcs Half round steel file 1pcs

Round steel file 1pcs

Triangle steel file 1pcs

Square steel file 1pcs







Contact details:

1 Manchester Road Wadeville, 1422

Daniel de Wet: +2784 608 5615 **Email:** d.dewet@renttechsa.co.za **HQ:** +2711 824 0410

renttechsa.co.za/totaltoolscatalogue

